

# NSCE65-160/185/P26PCC4

## Technical data

Company name  
Contact  
Phone number  
e-mail address

Operating data				
1	Pumpe type	Single head pump	Fluid	Water, pure
2	No. of pumps	1	Operating temperature t A	°F 39.2
3	Nominal flow	US g.p.m. 0	Max / Min Operating Temperature mech. Seal	°F 120 / -25
4	Nominal head	ft 0	pH-value at t A	7
5	Static head	ft 0	Density at t A	lb/ft <sup>3</sup> 62.4
6	Inlet pressure	psi 0	Kin. viscosity at t A	ft <sup>2</sup> /s 1.689E-5
7	Environmental temperature	°F 68	Vapor pressure at t A	psi 14.5
8	Available system NPSH	ft 0	Altitude	0

Pump data				
9	Lubrication	Standard, Grease lubrication [Std]		
10	Execution	2 poles motor		
11	Design	Horizontal		
12	Operating speed	3540 rpm	Stages	1
13	Suction nozzle	DN 80 / PN 16 / EN1092-2	Impeller Ø	Max. inch 6 5/8
14	Discharge nozzle	DN 65 / PN 16 / EN1092-2		designed inch 6 1/4
15	Max. casing pressure	psi	Flow	Min. inch 5 15/16
16	Max. working pressure	psi 69.5		Nominal US g.p.m.
17	Impeller type	Radial impeller		Max- US g.p.m. 810.5
18	Head H(Q=0)	ft 160	Head	Min- US g.p.m. 160.3
19	Max. shaft power	hp 24.5		Nominal ft
20	Pump weight	kg	at Qmax ft 84.7	at Qmin ft 159.8
21	Total weight	lb 346.1	Shaft power	hp
			Efficiency	%
			NPSH 3%	ft

Materials				
22		<b>Pump</b>	<b>Shaft Seal</b>	
23	Volute Casing	Cast Iron	Single mechanical seal, without shaft sleeve	
24	Casing Cover	Cast Iron	eMG12 - Ø28mm	BQ7EGG-WA
25	Impeller	Cast Iron	Mechanical seal diameter	1 1/8 inch
26	Shaft	Stainless steel	1. Rotating ring	Carbon graphite resin impregnated
27	Wear ring	Stainless steel	2. Stationary ring	SiC, silicon carbide, sintered press.less
28	Impeller lock nut and washer	Stainless steel	3. Secondary seal	Ethylene propylene rubber (EPDM)
29	Impeller key	Stainless steel	4. Springs	CrNiMo - Steel
30	Fill and drain plugs	Stainless steel	5. Others	EPDM - WRAS
31			Gaskets of the pump	Ethylene propylene rubber (EPDM)
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				

Motor data				
Electrical and dimensional data refer to IE3 motor				
42	Manufacturer	Lowara		
43	Specific design	IE3 3ph Flange Motor		
44	Type	PLM 160 B34 18,5 kW		
45	Rated power	24.809 hp	Rated current	58.3 A
46	Nominal speed	3540 rpm	Rated voltage	220 V
47	Frame size	160	Service factor	1
48	Weight	lb 257.9	Degree of protection	IP55

Remarks				
49				
50				
50				
52				

# NSCE65-160/185/P26PCC4

## Performance curve

Company name  
Contact  
Phone number  
e-mail address


	Ø mm	Pump capacity Operating range η			Pump head H(Q=0) η		Shaft power P2 P2(Q=0) η			Frequency	Hz	
		Min. US g.p.m.	Max. US g.p.m.	Max. US g.p.m.	H(Q=0) ft	Max. ft	P2(Q=0) hp	Max. hp	η hp	Operating speed	rpm	
actual	6 1/4	160	810	579	160	128	24.5	23.1		Nominal flow	US g.p.m.	0
Min.	0	/	/	544	143	115	/	19.5		Nominal head	ft	0
Max.	6 5/8	/	/	631	181	146	/	28.2		Inlet pressure	psi	0
										Static head	ft	0

**Power datas referred to:**

hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 3B

Water, pure [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s

MEI: N.A - according to Ecodesign Directive 2009/125/EC and Regulation (EU) No.547/2012

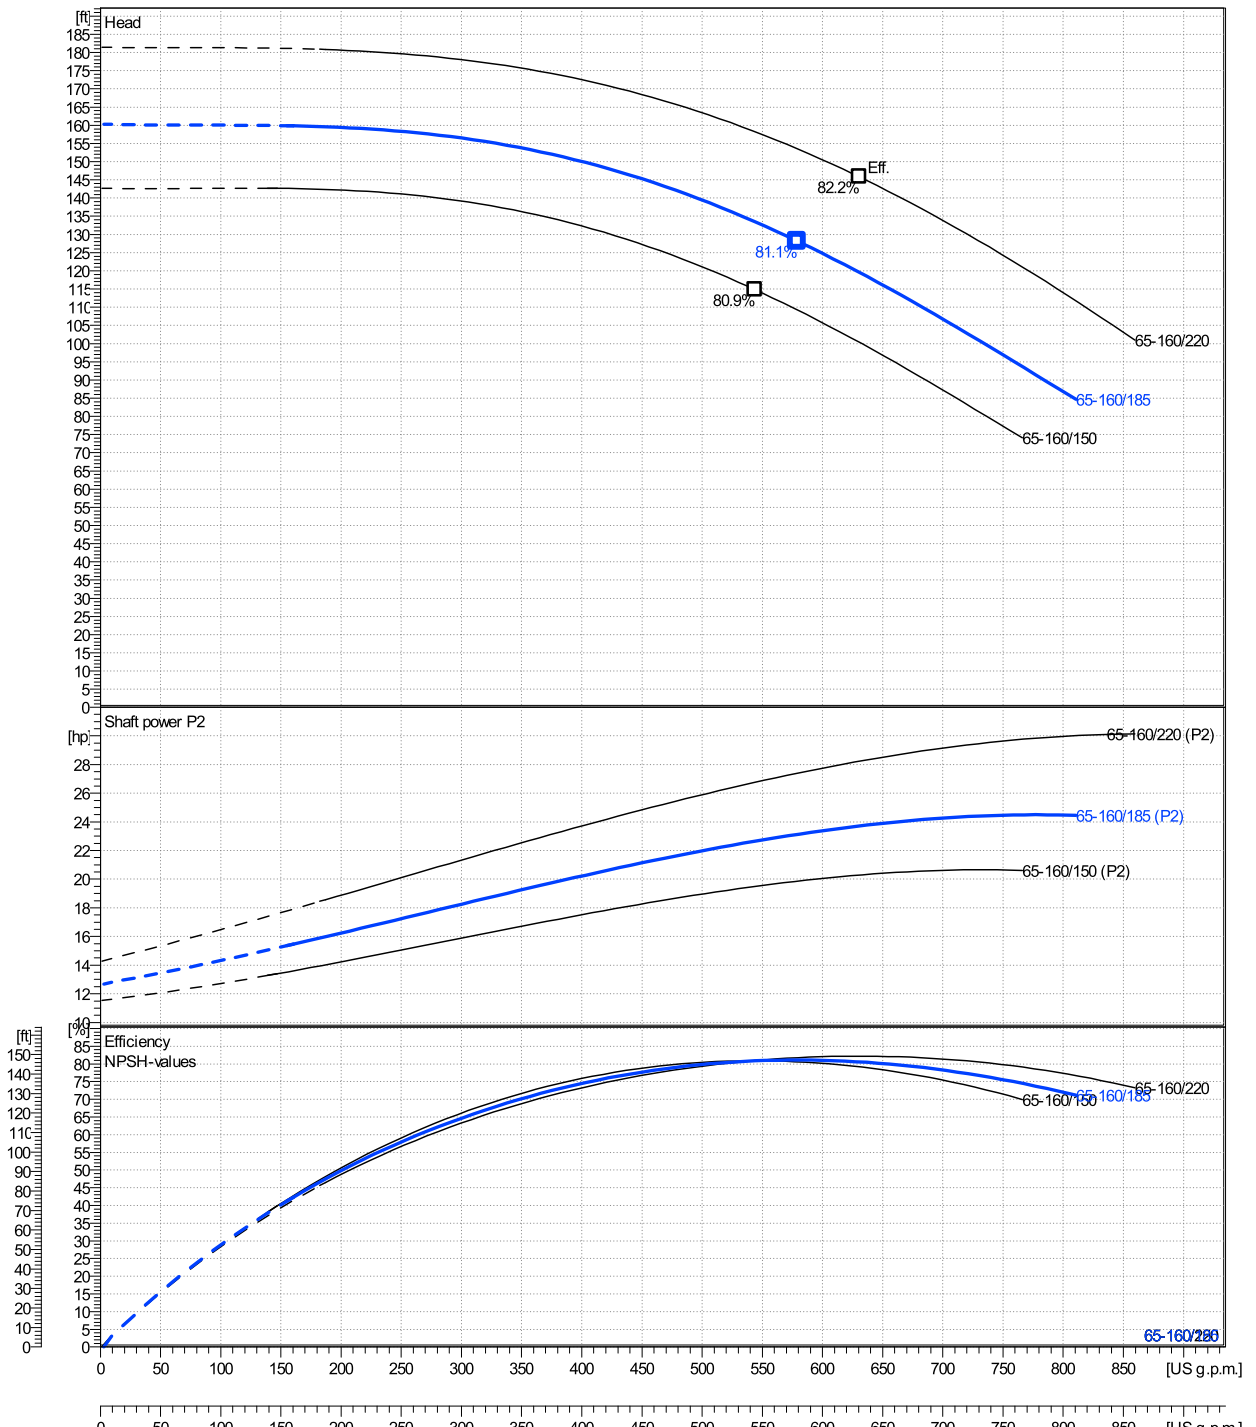


# NSCE65-160/185/P26PCC4

## Dimensions

Company name  
Contact  
Phone number  
e-mail address

Extended shaft  
2 poles motor  
PLM 160 B34 18,5 kW

Electrical and dimensional data refer to IE3 motor

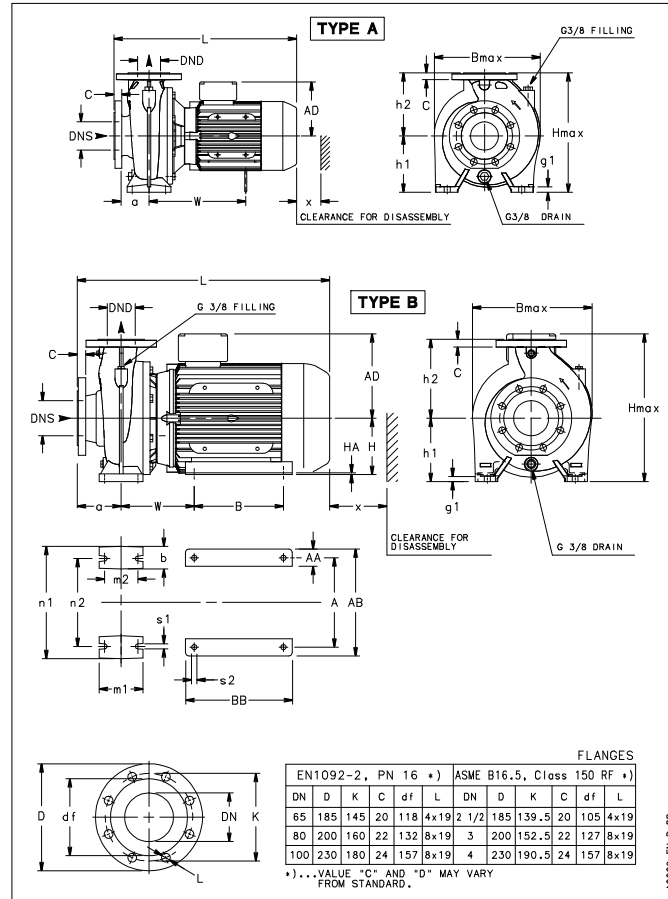

Note:  
Weight and Dimensions of selected Hydrovar are NOT considered.  
Please refer to additional datasheet.

### Dimensions and weight without obligation

<b>Project</b>	NSCE65-160/220/P26PCC4	<b>Created by</b>		<b>Last update</b>	1/9/2025
<b>Block</b>		<b>Created on</b>	1/9/2025		

### Dimensions [ inch ]

A (Motor)	10	Type	B
a	3 <sup>15</sup> / <sub>16</sub>	W	8 <sup>3</sup> / <sub>16</sub>
AA	1 <sup>15</sup> / <sub>16</sub>	x	4 <sup>1</sup> / <sub>4</sub>
AB	11 <sup>15</sup> / <sub>16</sub>		
AD	9 <sup>7</sup> / <sub>16</sub>		
B (Motor)	10		
B max	13 <sup>3</sup> / <sub>16</sub>		
b	2 <sup>9</sup> / <sub>16</sub>		
BB	11 <sup>15</sup> / <sub>16</sub>		
DND	2 <sup>9</sup> / <sub>16</sub>		
DNS	3 <sup>1</sup> / <sub>8</sub>		
g1	5 <sup>5</sup> / <sub>8</sub>		
H (Motor)	6 <sup>5</sup> / <sub>16</sub>		
H max	15 <sup>3</sup> / <sub>4</sub>		
h1	6 <sup>5</sup> / <sub>16</sub>		
h2	7 <sup>7</sup> / <sub>8</sub>		
HA	3 <sup>1</sup> / <sub>16</sub>		
L	27 <sup>5</sup> / <sub>16</sub>		
m1	4 <sup>15</sup> / <sub>16</sub>		
m2	3 <sup>3</sup> / <sub>4</sub>		
n1	11 <sup>1</sup> / <sub>32</sub>		
n2	8 <sup>3</sup> / <sub>8</sub>		
s1	9 <sup>9</sup> / <sub>16</sub>		
s2	9 <sup>9</sup> / <sub>16</sub>		

Weight	
<b>Total weight</b>	157 kg

### Connections

Suction nozzle		Discharge nozzle	
DN 80		DN 65	
PN 16		PN 16	
EN1092-2		EN1092-2	
C	7 <sup>7</sup> / <sub>8</sub>	C	13 <sup>1</sup> / <sub>16</sub>
D	7 <sup>7</sup> / <sub>8</sub>	D	7 <sup>5</sup> / <sub>16</sub>
df	5 <sup>3</sup> / <sub>16</sub>	df	4 <sup>5</sup> / <sub>8</sub>
DN	3 <sup>1</sup> / <sub>8</sub>	DN	2 <sup>9</sup> / <sub>16</sub>
K	6 <sup>5</sup> / <sub>16</sub>	K	5 <sup>11</sup> / <sub>16</sub>
L	8 x 19	L	4 x 19

