

## NSCS80-160/55/P46PCC4

### Technical data

Company name  
Contact  
Phone number  
e-mail address

#### Operating data

1	Pumpe type	Single head pump	Fluid	Water, pure
2	No. of pumps	1	Operating temperature t A	°F 39.2
3	Nominal flow	US g.p.m. 0	Max / Min Operating Temperature mech. Seal	°F 120 / -25
4	Nominal head	ft 0	pH-value at t A	7
5	Static head	ft 0	Density at t A	lb/ft <sup>3</sup> 62.4
6	Inlet pressure	psi 0	Kin. viscosity at t A	ft <sup>2</sup> /s 1.689E-5
7	Environmental temperature	°F 68	Vapor pressure at t A	psi 14.5
8	Available system NPSH	ft 0	Altitude	0

#### Pump data

9	Lubrication	Standard, Grease lubrication [Std]		
10	Execution	4 poles motor		
11	Design	Horizontal		
12	Operating speed	1750 rpm	Stages	1
13	Suction nozzle	DN 100 /	PN 16 /	EN1092-2
14	Discharge nozzle	DN 80 /	PN 16 /	EN1092-2
15	Max. casing pressure	psi		
16	Max. working pressure	psi	21.8	
17	Impeller type	Radial impeller		
18	Head H(Q=0)	ft	50	
19	Max. shaft power	hp	6.3	
20	Pump weight	kg		
21	Total weight	lb	262.3	

Impeller Ø	Max.	inch	6 15/16
	designed	inch	6 15/16
	Min.	inch	5 11/16
Flow	Nominal US g.p.m.		
	Max-	US g.p.m.	726.5
	Min-	US g.p.m.	158.5
Head	Nominal		
	at Qmax	ft	22.8
	at Qmin	ft	49.7
Shaft power		hp	
Efficiency		%	
NPSH 3%		ft	

#### Materials

Pump		Shaft Seal	
23	Volute Casing	Cast Iron	Single mechanical seal, without shaft sleeve
24	Casing Cover	Cast Iron	eMG12 - Ø28mm
25	Impeller	Cast Iron	Mechanical seal diameter
26	Shaft	Stainless steel	1. Rotating ring
27	Wear ring	Stainless steel	2. Stationary ring
28	Impeller lock nut and washer	Stainless steel	3. Secondary seal
29	Impeller key	Stainless steel	4. Springs
30	Fill and drain plugs	Stainless steel	5. Others
31			Gaskets of the pump
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			

#### Motor data

Electrical and dimensional data refer to IE3 motor

42	Manufacturer	Lowara		
43	Specific design	IE3 3ph Flange Motor - Premium Efficiency		
44	Type	PLM 132 B5 5,5 kW		
45	Rated power	7.3756 hp	Rated current	11.6 A
46	Nominal speed	1758 rpm	Rated voltage	380 V
47	Frame size	132	Service factor	1
48	Weight	lb 138.0	Degree of protection	IP55

#### Remarks

49	
50	
50	
52	

Project	Xylect-2017897	Created by		Last update	1/10/2025
Block	NSCS80-160/370/L26UCC4	Created on	1/10/2025		

# NSCS80-160/55/P46PCC4

## Performance curve

Company name  
Contact  
Phone number  
e-mail address


	Ø mm	Pump capacity Operating range η			Pump head H(Q=0) η		Shaft power P2 P2(Q=0) η			Frequency Hz	
		Min. US g.p.m.	Max. US g.p.m.	Max. US g.p.m.	ft	ft	hp	Max. hp	η hp	rpm	
actual	6 15/16	159	726	477	50.3	39.1	6.33	5.86	80.3%	1750	0
Min.	0	/	/	405	31.8	21.6	/	2.95			0
Max.	6 15/16	/	/	477	50.3	39.1	/	5.86			0

**Power datas referred to:**

hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 3B

Water, pure [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s

MEI: N.A - according to Ecodesign Directive 2009/125/EC and Regulation (EU) No.547/2012

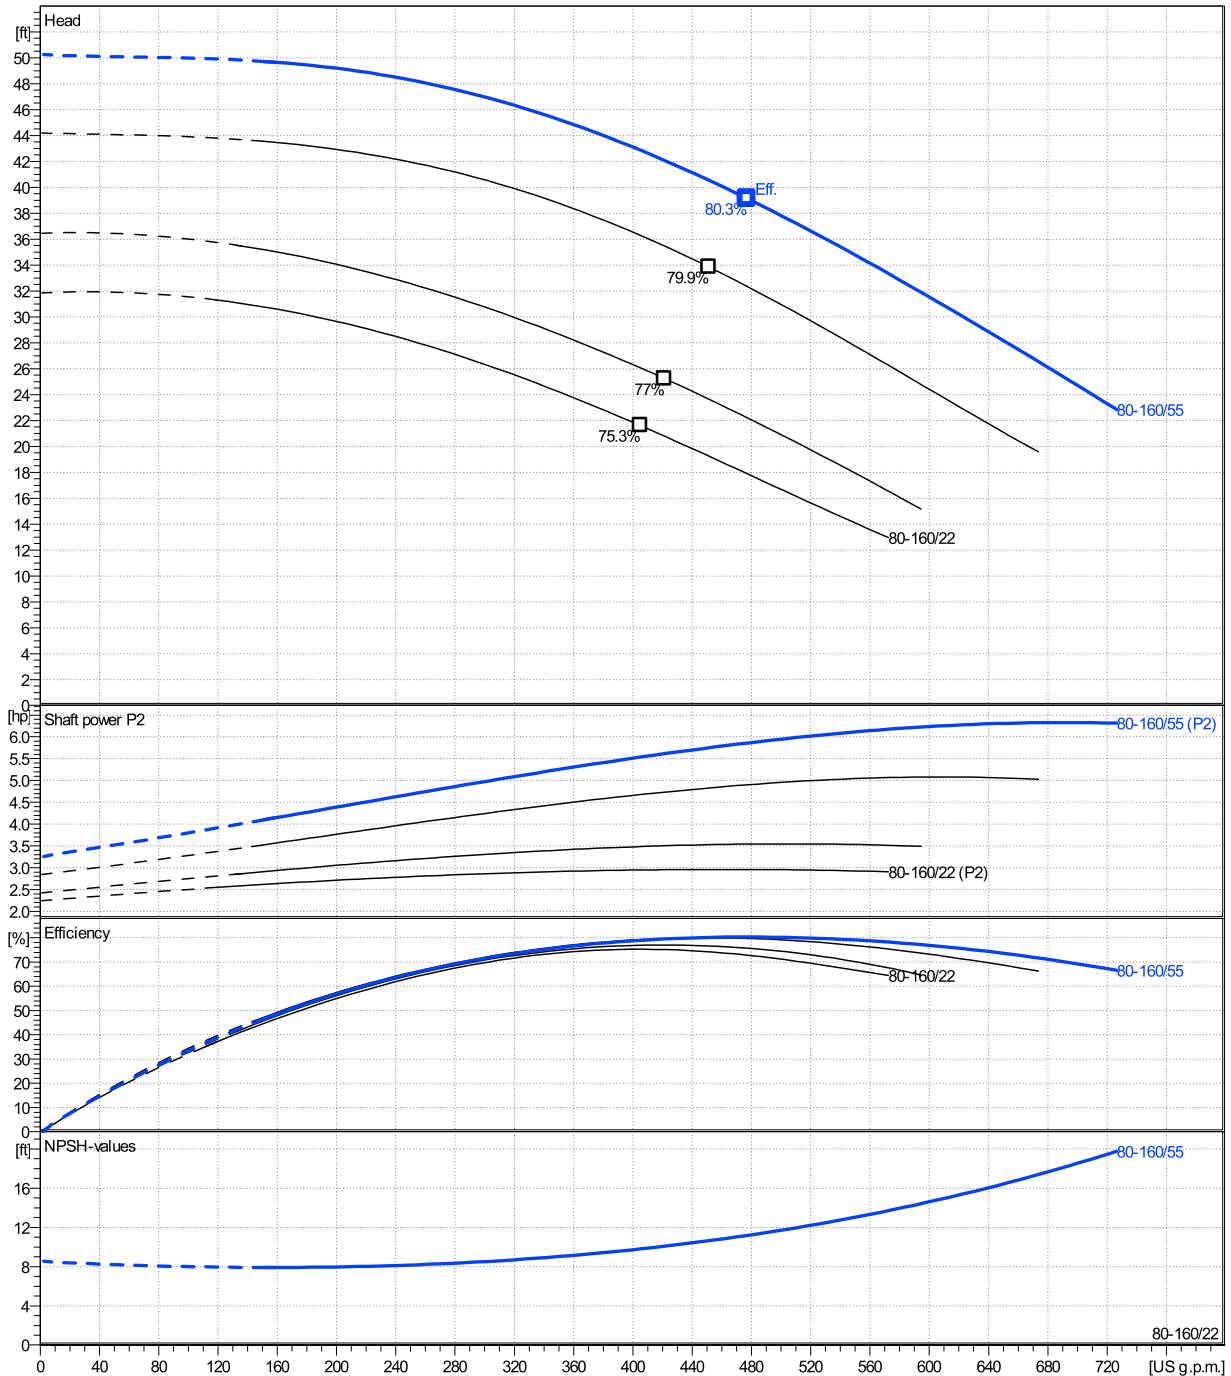



# NSCS80-160/55/P46PCC4

# Dimensions

Company name  
Contact  
Phone number  
e-mail address

Blockpump  
4 poles motor  
PLM 132 B5 5,5 kW

Electrical and dimensional data refer to IE3 motor

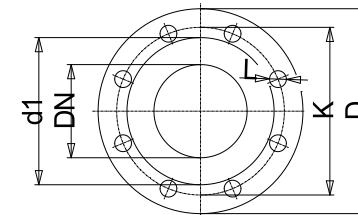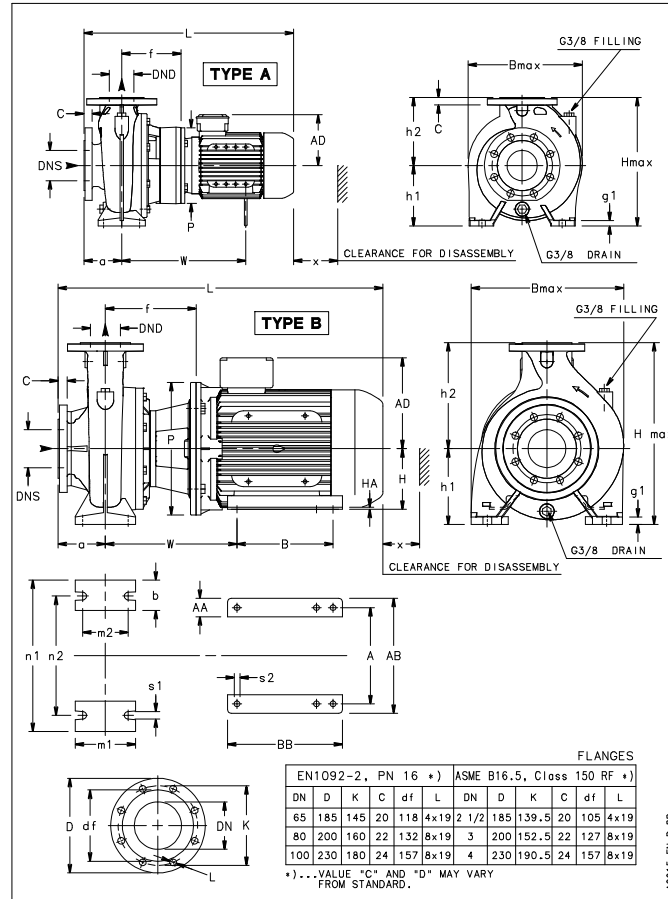

Value C, D may vary from Standard

## Dimensions [ inch ]

a	4 <sup>15</sup> / <sub>16</sub>		
AD	7 <sup>1</sup> / <sub>2</sub>		
b	2 <sup>9</sup> / <sub>16</sub>		
Bmax	13 <sup>3</sup> / <sub>8</sub>		
DNd	3 <sup>1</sup> / <sub>8</sub>		
DNs	3 <sup>15</sup> / <sub>16</sub>		
f	7 <sup>9</sup> / <sub>16</sub>		
g1	5 <sup>5</sup> / <sub>8</sub>		
h1	7 <sup>1</sup> / <sub>16</sub>		
h2	8 <sup>7</sup> / <sub>8</sub>		
Hmax	15 <sup>15</sup> / <sub>16</sub>		
L	28 <sup>7</sup> / <sub>16</sub>		
m1	4 <sup>15</sup> / <sub>16</sub>		
m2	3 <sup>3</sup> / <sub>4</sub>		
n1	12 <sup>5</sup> / <sub>8</sub>		
n2	9 <sup>13</sup> / <sub>16</sub>		
P	11 <sup>13</sup> / <sub>16</sub>		
s1	9 <sup>9</sup> / <sub>16</sub>		
Type	A		
Volumen	1 <sup>1</sup> / <sub>28</sub>		
w	17 <sup>1</sup> / <sub>8</sub>		
x	4 <sup>13</sup> / <sub>16</sub>		

## Weight

<b>Total weight</b>	<b>119 kg</b>
---------------------	---------------

## Connections

Suction nozzle		Discharge nozzle	
<b>DN 100</b>		<b>DN 80</b>	
<b>PN 16</b>		<b>PN 16</b>	
<b>EN1092-2</b>		<b>EN1092-2</b>	
C	1 <sup>5</sup> / <sub>16</sub>	C	7 <sup>7</sup> / <sub>8</sub>
D	9 <sup>1</sup> / <sub>16</sub>	D	7 <sup>7</sup> / <sub>8</sub>
df	6 <sup>3</sup> / <sub>16</sub>	df	5 <sup>3</sup> / <sub>8</sub>
DN	3 <sup>15</sup> / <sub>16</sub>	DN	3 <sup>1</sup> / <sub>8</sub>
K	7 <sup>1</sup> / <sub>16</sub>	K	6 <sup>5</sup> / <sub>16</sub>
L	8 x 19	L	8 x 19

## Dimensions and weight without obligation

<b>Project</b>	Xylect-20178897
<b>Block</b>	NSCS80-160/370/L26UCC4

Created by  
Created on 1/10/2025

Last update 1/10/2025