

# Technical Data

Pump Name

GS4 32-125.1-140/B/0.37

Customer	Date	2024-06-14	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-06-14 18:50:3	E-mail

## Requested data

1	Pump type	End Suction Volute Pump	Fluid	Water
2	Number of pumps / Reserve	1 / 0	Liquid temperature	°C 20
3	Flow	m³/h	Kin. viscosity	mm²/s 1.005
4	Head	m	Vapour pressure	bar 0.0234
5	Geodetic head	m	PH value	
6	Inlet pressure (pin)	bar	Density	kg/m³ 998.3
7	Available system NPSH		Solids	Weight % 0
8	Ambient temperature	°C 20		

## Pump

9	Pump Name	GS4 32-125.1-140/B/0.37	Frequency	Hz	50
10	Design	End Suction Volute Pump	Installation type	with base, motor	
11	Manufacturer	EBARA	Impeller Diameter	Max.	mm 140
12	Speed	rpm 1450		Designed	mm 140
13	No. of Stage	1		Min.	mm 100
14	Connection	Suction side EN PN16	Flow	Operating	m³/h
15	Connection	Discharge side EN PN16		Max-	m³/h 14.7
16	Max Working Pressure	bar 16		Min-	m³/h 1.98
17	Shut-off head	bar 0.61	Head	Operating	m
18	Total weight	kg See the table of "Dimensions".		- (Qmax.)	m 4.9
19	Shaft power	kW		- (Qmin.)	m 6.3
20			Max. Shaft Power at max. impeller	kW	0.29
21	Required pump NPSH	m	Efficiency	%	

## Materials

22	Casing	Cast iron		
23	Impeller	Cast iron		
24	Shaft	Cr. Steel		
25	Case wear ring	Bronze		
26	O-ring	EPDM		
27	Mechanical seal	SiC/Carbon/EPDM		

## Motor

28	Manufacturer	WEG	Insulation class	F
29	Type	71_0.37_3_400	Phases	3~
30	Specific design	TEFC/B3/IE2/W22 / 50 Hz / Pole pairs 2	Frame size	71
31	Rated power	kW 0.37	Weight	kg 11
32	Number of poles	4	Electric voltage	V 400
33	Speed	rpm 1390	Electric current	A 1.03
34	Degree of protection	IP55		
35				

## Remarks

# Performance Curve

Pump Name

GS4 32-125.1-140/B/0.37

Customer	Date	2024-06-14	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-06-14 18:50:31	E-mail

**Requested data**


1	Flow	m³/h	
2	Head	m	
3	Geodetic head	m	

**Pump**

Operating flow	m³/h		Frequency	Hz	50
Operating head	m		Number of poles		4
Impeller diameter designed	mm	140	Speed	rpm	1450

Test standard: ISO 9906:2012 - Grade3B

Water; 20°C; 998.3kg/m³; 1mm²/s

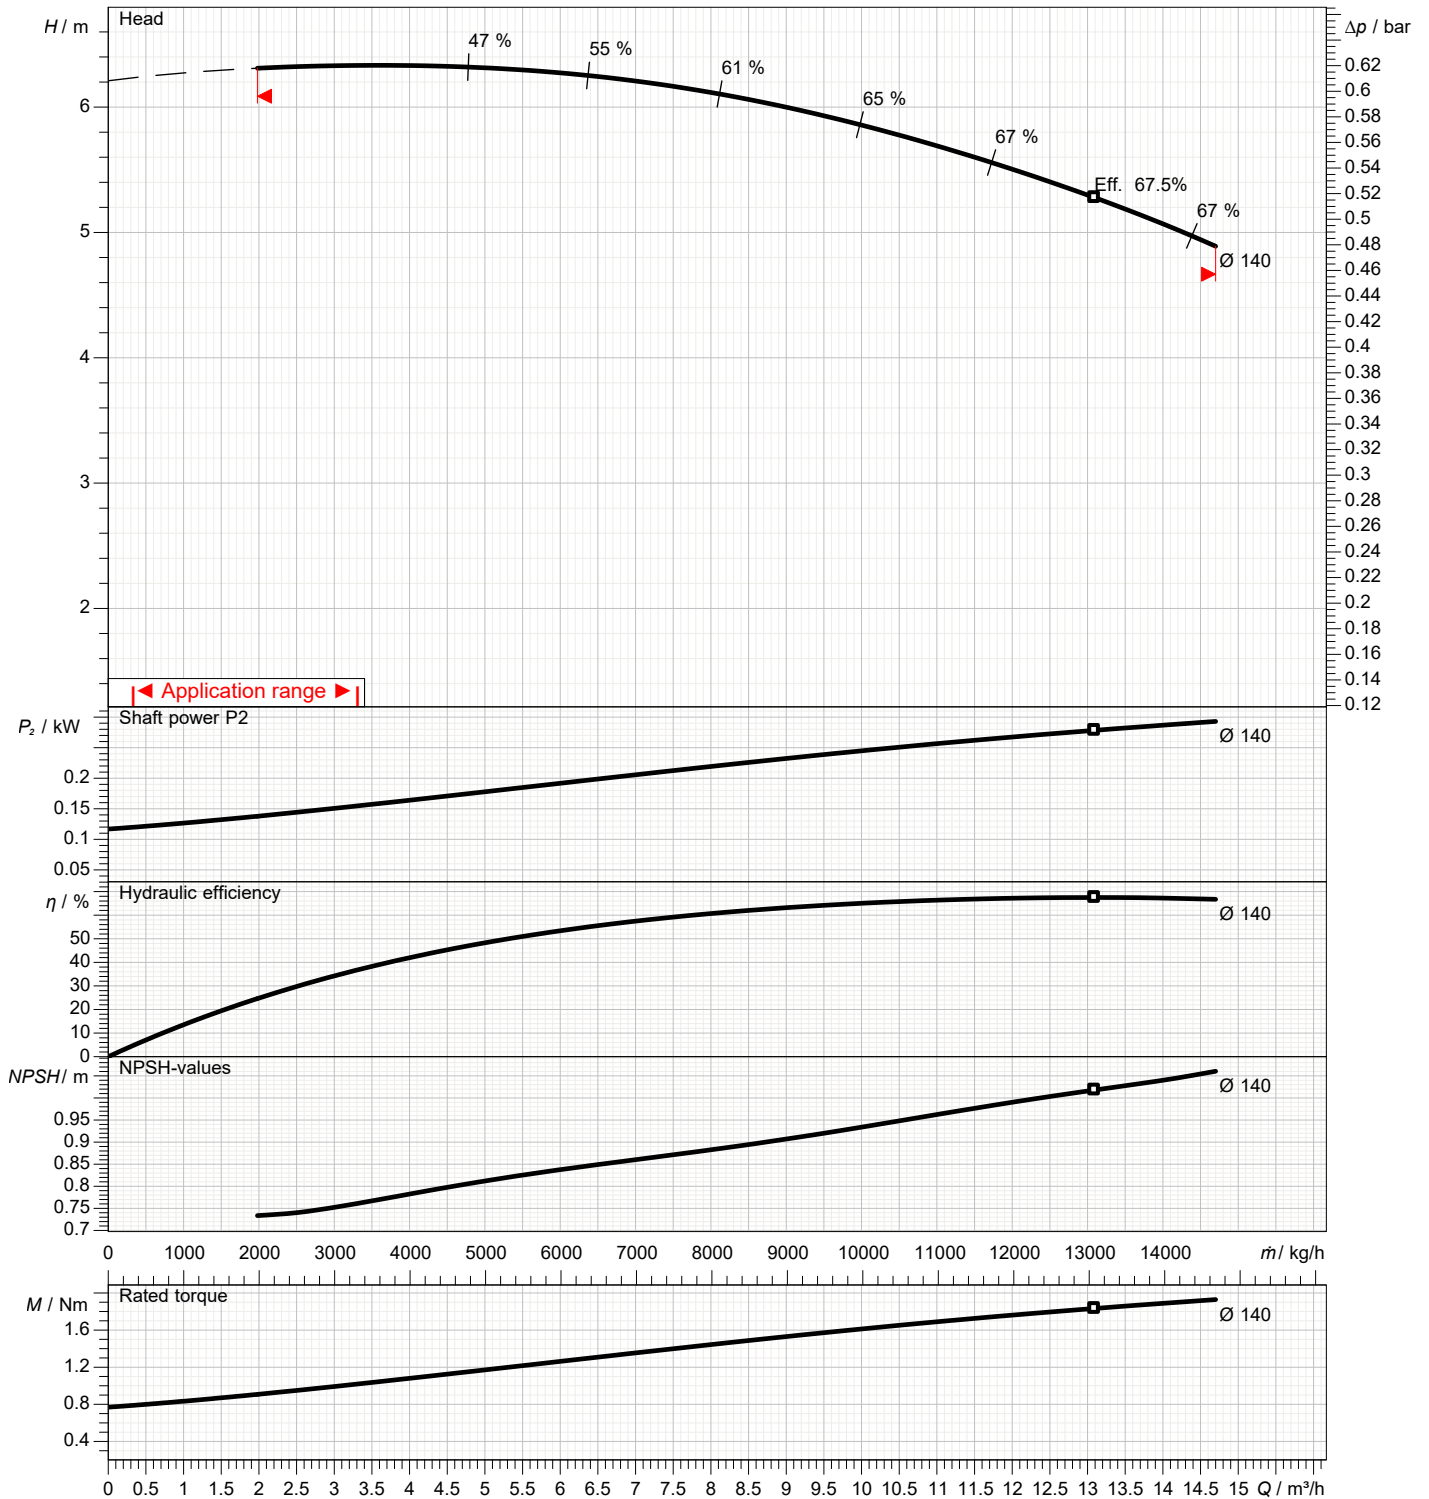

# Dimensions

Pump name GS4 32-125.1-140/B/0.37

Customer	Date 2024-06-14	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID Proiect redenumit 2024-06-14 18:50:3	E-mail



Total weight : 65 kg

Pump dimensions		mm	Suction side	mm	Discharge side	mm
a	80		A	165	A	140
A	900		d	19	d	19
B	390		D1	125	D1	100
c	80		D2	99	D2	76
DN1	50		dn	50	dn	32
DN2	32		N	4(Num)	N	4(Num)
E	350		t	2	t	2
H	50		T	20	T	18
h1	112					
h2	140					
s	18					
T	691					
V	600					
Y	150					

# Construction

Pump name GS4 32-125.1-140/B/0.37

Customer	Date 2024-06-14	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID Proiect redenumit 2024-06-14 18:50:31	E-mail