

Technical Data

Pump Name

LPC 65-125/4.06 QQPFF

Customer	Date	2024-07-02	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-07-02 22:34:28	E-mail

Requested data

1	Pump type	CENTRIFUGAL PUMPS	Fluid	Water
2	Number of pumps / Reserve	1 / 0	Liquid temperature	°C
3	Flow m³/h		Kin. viscosity	mm²/s
4	Head m		Vapour pressure	bar
5	Geodetic head m		PH value	
6	Inlet pressure (pin) bar	0	Density	kg/m³
7	Available system NPSH		Solids Weight %	0
8	Ambient temperature °C	20		

Pump

9	Pump Name	LPC 65-125/4.06 QQPFF	Frequency	Hz	60
10	Design	CENTRIFUGAL PUMPS	Installation type		STANDARD
11	Manufacturer	EBARA	Impeller Diameter	Max. mm	120
12	Speed rpm	3500		Designed mm	120
13	No. of Stage	1		Min. mm	120
14	Connection Suction side		Flow	Operating m³/h	
15	Connection Discharge side			Max- m³/h	60
16	Max Working Pressure bar	10		Min- m³/h	14
17	Shut-off head bar	2.58	Head	Operating m	
18	Total weight kg	See the table of "Dimensions".		- (Qmax.) m	17.7
19	Shaft power kW			- (Qmin.) m	26.1
20			Max. Shaft Power at max. impeller	kW	4.04
21	Required pump NPSH m		Efficiency	%	

Materials

22	Impeller	EN-GJL-200		
23	Intermediate casing	EN-GJL-200		
24	Bottom casing	EN-GJL-200		
25	Shaft	Stainless steel		
26	Gasket	AF1600		
27				

Motor

28	Manufacturer	LAFERT	Insulation class	F
29	Type	TEFC_LPC 65-125/4.06_265_Three Phase	Phases	3~
30	Specific design	IE2 / 60 Hz / Pole pairs 1	Frame size	100
31	Rated power kW	4	Weight kg	26.5
32	Number of poles	2	Electric voltage V	265
33	Speed rpm	3520	Electric current A	12.5
34	Degree of protection	IP 55		
35				

Remarks


LPC 65-125/4.06 QQPFF

Customer	Date	2024-07-02	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-07-02 22:34:23	E-mail

Pump

1	Flow	m³/h		Operating flow	m³/h		Frequency	Hz	60
2	Head	m		Operating head	m		Number of poles		2
3	Geodetic head	m		Impeller diameter designed	mm	120	Speed	rpm	3500


Water; 20°C; 998.3kg/m³; 1mm²/s

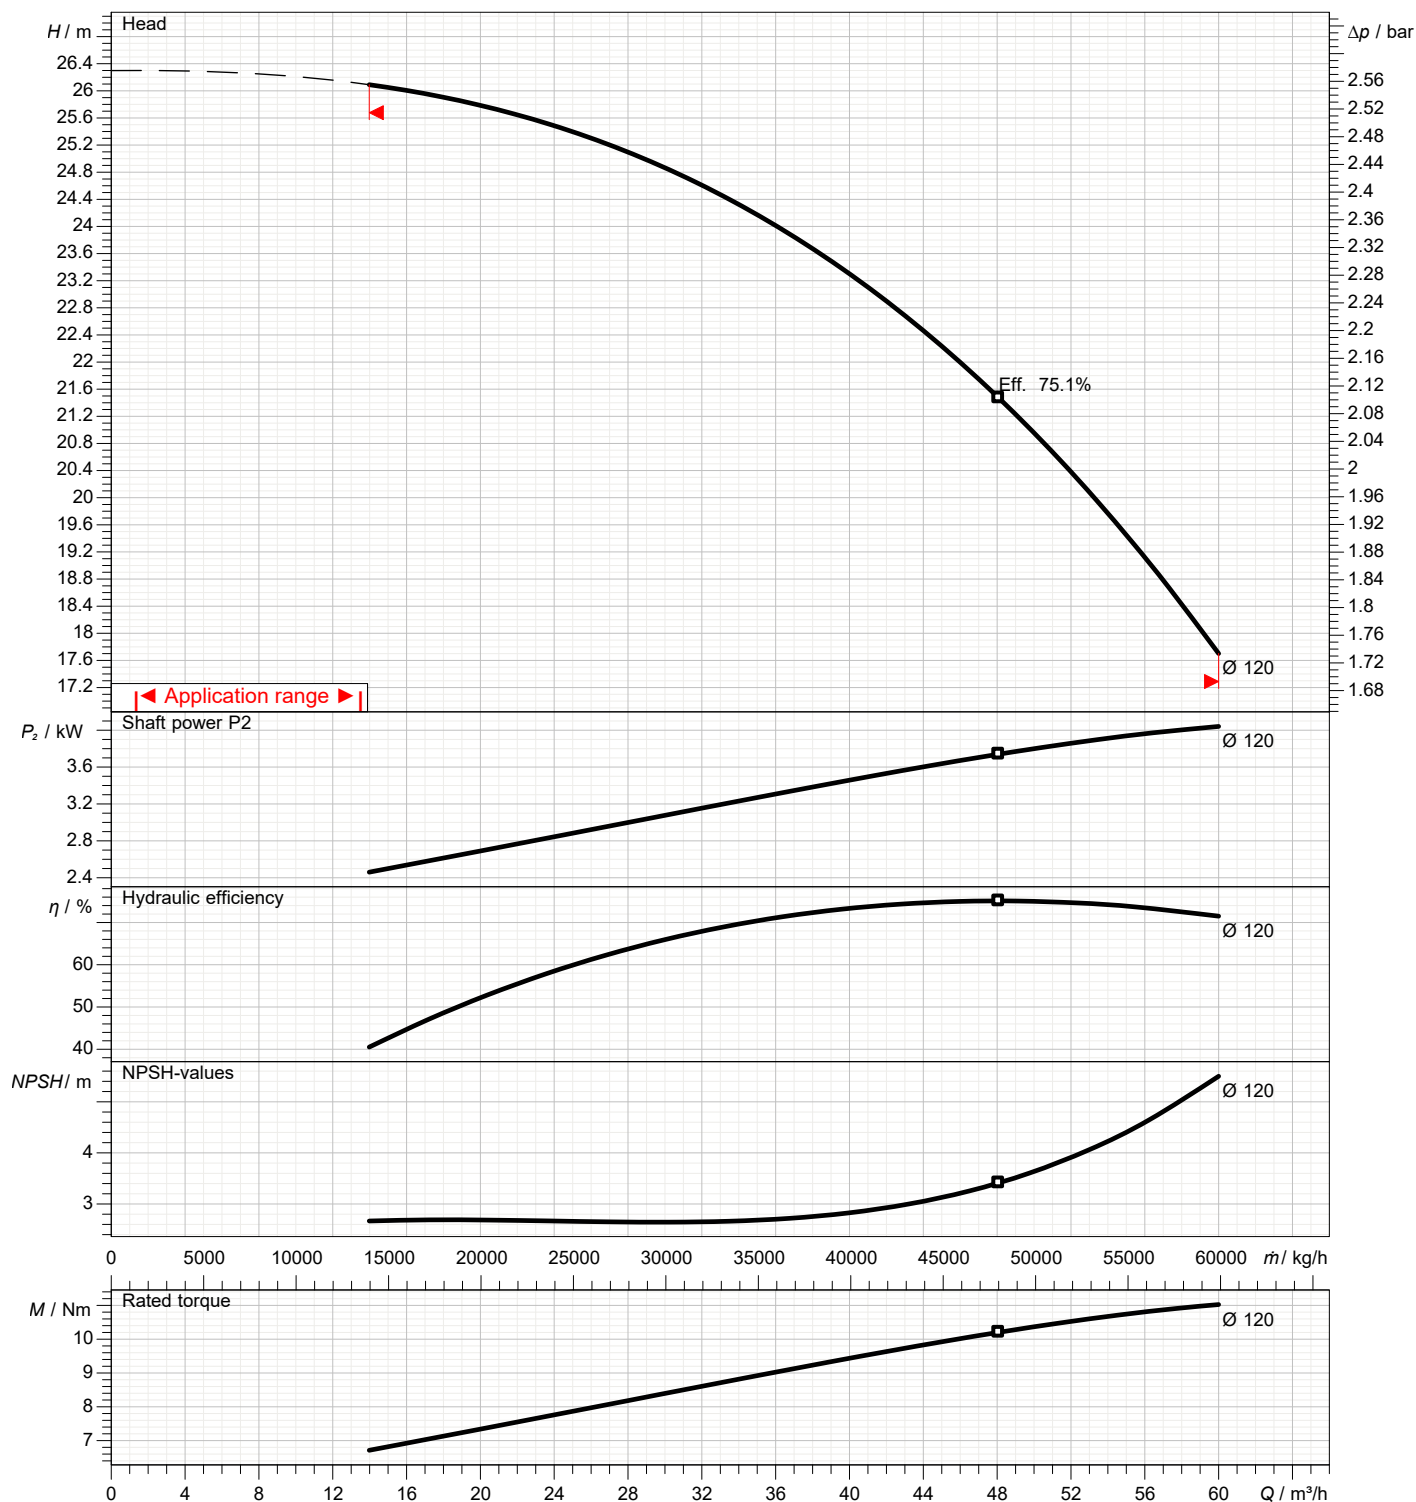

Dimensions

Pump name LPC 65-125/4.06 QQPFF

Customer	Date	2024-07-02	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-07-02 22:34:28	E-mail

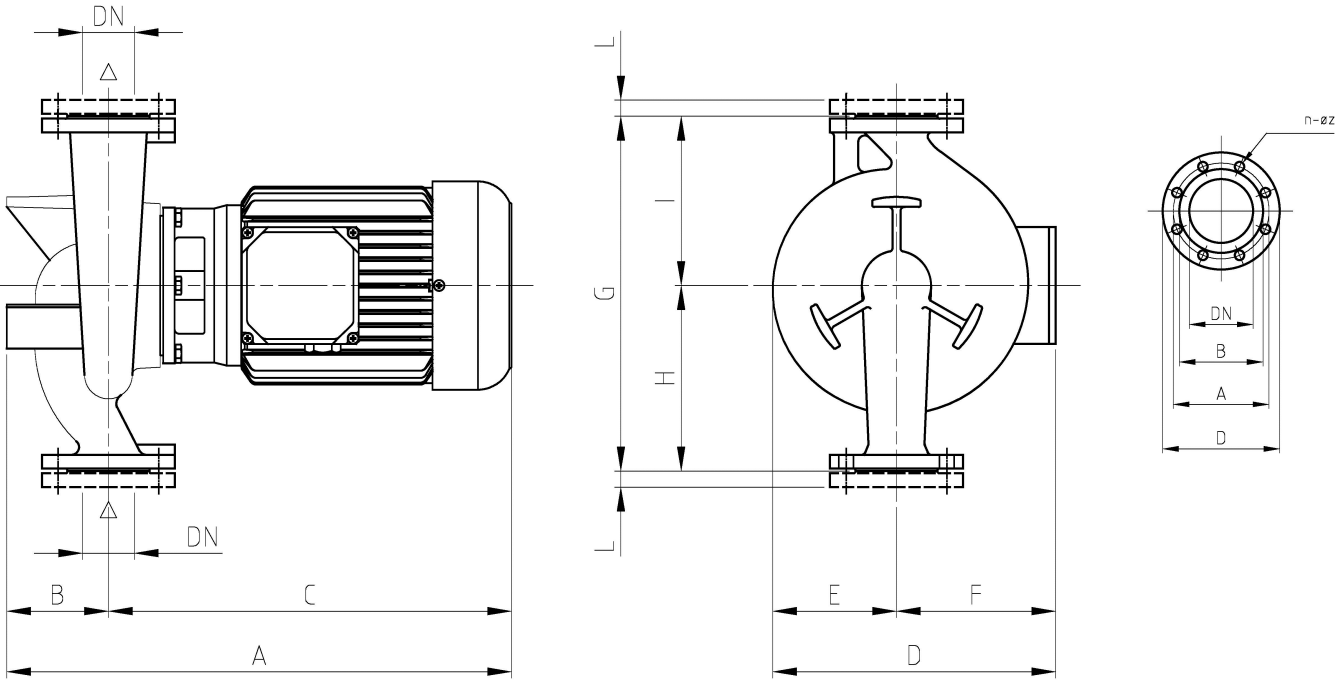

Dimensions in mm								
1	A	560	L Weight P&M	22				
2	B	140		43,2 kg				
3	C	420						
4	D	253						
5	Dia A	145						
6	Dia B	122						
7	Dia D	185						
8	Dia DN	65						
9	Dia n	4						
10	Dia Z	18						
11	E	108						
12	F	145						
13	G	360						
14	H	205						
15	I	155						


(1/2)

Construction

Pump name

LPC 65-125/4.06 QQPFF

Customer	Date2024-07-02	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenunit 2024-07-02 22:34:28	E-mail

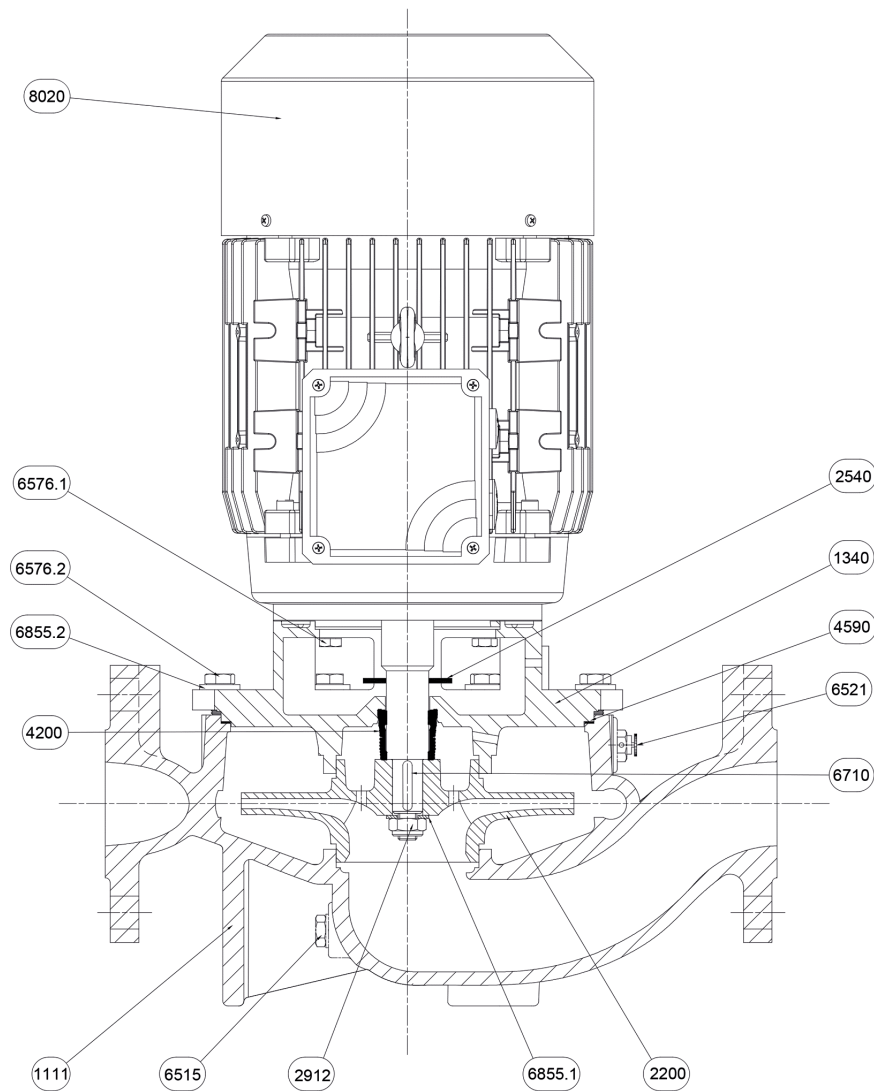

N°	PART NAME	MATERIAL	Q.TY
1111	Pump casing	EN-GJL-200	1
1340	Latern-Cover	EN-GJL-200	1
2200	Impeller	EN-GJL-200	1
2540	Baffle	NB 70	1
2912	Impeller nut	6.8-ZN	1
4200	Mechanical seal	Sic/Sic/NBR/AISI 304	1
4590	Gasket	AF 1600	1
6515	Drain plug	EN-GJMB-350-10	1
6521	Vent valve	CW509L	1
6576.1	Hexagonal head screw	8.8-ZN	4
6576.2	Hexagonal head screw	8.8-ZN	4
6710	Key	C50	1
6855.1	Impeller washer	R40-ZN	1
6855.2	Washer	R40-ZN	4
8020	Motor		1


(2/2)

Construction

Pump name

LPC 65-125/4.06 QQPFF

Customer	Date2024-07-02	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-07-02 22:34:28	E-mail

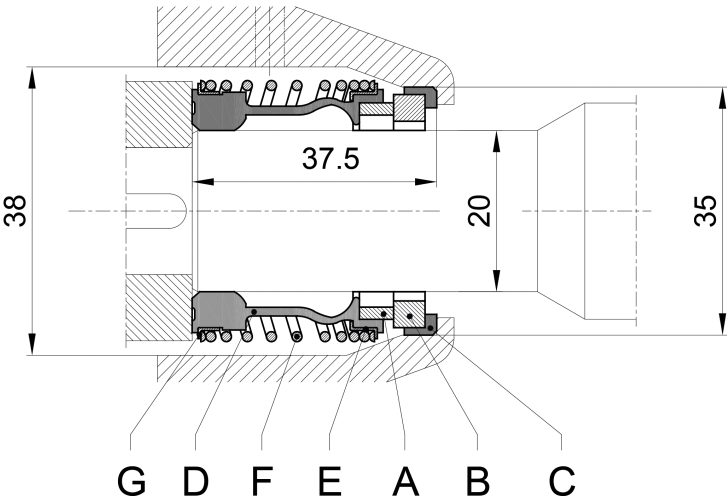

Ref.	Name	Material
A	Rotary seal ring	Carbon
B	Stationary seal ring	Silicon Carbide
C	Gasket	EPDM
D	Bellows	EPDM
E	Spring plate	AISI 304
F	Spring	AISI 304
G	Spring plate	AISI 304