

**Tender text**

**Project name**  
**Project ID**

**Customer**  
 Contact  
 E-mail  
 Phone

**Company**  
 Contact  
 E-mail  
 Phone

2025-01-20

Page 1 / 3

Pos.no	Description	Item no.
	<b>Submersible dirty water motor pumps</b>	
	AmaDrainer C 411 SE / 35	29128688
	<b>Ama-Drainer C 411 E / 35</b>	
	Vertical single-stage fully floodable submersible motor pump in close-coupled design, IP68, with level control, max. immersion depth: 7m.	
	<ul style="list-style-type: none"> <li>- Connection socket or discharge elbow with internal thread</li> <li>- 10-metre power cable</li> <li>- With float switch</li> </ul>	
	<b>Operating data</b>	
	Fluid handled	: Water
	Flow rate Q	:
	Head H	:
	Permissible fluid temperature	: max.40°C in continuous duty
	<b>Drive</b>	
	Supply voltage	: 1~ 230 / 50 Hz
	Frequency	: 50 Hz
	Nominal power P1	: 1,449 kW
	Motor rating P2	: 1,1 kW
	Nominal current	: 6,85 A
	Enclosure	: IP68
	Motor winding to	: IEC 60038
	Motor design to	: EN 60043 T1/IEC 34-1
	Thermal class	: F
	Starting method	: DOL
	Pump controlled via integrated float switch	
	<b>Materials</b>	
	Pump casing	: Chrome nickel steel (1.4301)
	Suction cover	: Chrome nickel steel (1.4301)
	Impeller	: Polyamide (PA)
	Pump foot	: Polypropylene (PP)
	Rotor shaft	: Chrome steel (1.4021)



### Tender text

**Project name**

**Project ID**

**Customer**

Contact

E-mail

Phone

**Company**

Contact

E-mail

Phone

2025-01-20

Page 2 / 3

---

Pos.no	Description	Item no.	Qty.	UP / EUR	TP / EUR
	<b>Dimensions</b>				
	Free passage	: 35 mm			
	Discharge side	: DN 40			
	Length	: 300 mm			
	Width	: 440 mm			
	Height	: 280 mm			
	<b>Purchase order information</b>				
	Manufacturer	: KSB			
	Type series / size	: Ama-Drainer C 411 E / 35			
	Material price group	: 32			
	Weight	: 18,1 kg			
	<b>Item number</b>	: 29128688			

---

**Data sheet: technical data**

**Project name**  
**Project ID**


**Item-No.**  
**Design** Submersible dirty water motor pumps  
**Type / Coding** AmaDrainer C 411 SE / 35

**Customer**  
Contact  
E-mail  
Phone

**Company**  
Contact  
E-mail  
Phone

2025-01-20

Page 3 / 3

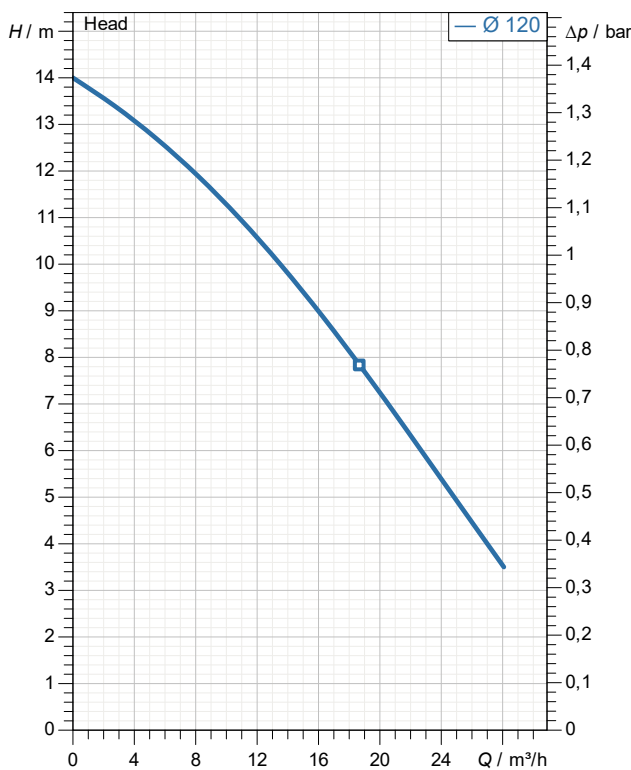

**demand data**

Flow  
Total head  
Geodetic head  
Media Water  
Liquid temperature 20 °C

**Pump data**

Make KSB  
Type AmaDrainer C 411 SE / 35  
Design Submersible dirty water motor p  
Specific design Single head pump  
No. of pumps 1  
Standby pump No  
Max. fluid temperature 40 °C

**Hydraulic data (Duty point)**

Flow  
Head

**Material / sealing element**

Pump casing Stainless steel 1.4401  
Shaft CrNiMo steel 1.4571  
Impeller  
O-ring  
Float switch

**Dimensions**

Discharge flange standard DN 40

**Rated motor data**

Power input (P1) 1,45 kW  
Rated power (Pn) 1,1 kW  
Speed 2.800 1/min  
Rated voltage 230 V  
Rated current (In) 6,85 A

**Product information**

Ident. No./ type key 29128688  
Weight loaded 18,1 kg  
Gross price 3.434,99 EUR  
PL 2025-01-20  
Price group 32