

Customer

Technical data


High-pressure multistage centrifugal pump Helix FIRST V 3602-5/16/E/S/460-60-FF240

Project ID: Untitled project 2025-03-05 07:27:14.016

Project name
Installation location
Customer pos. No.

Date: 2025-03-05

Duty chart

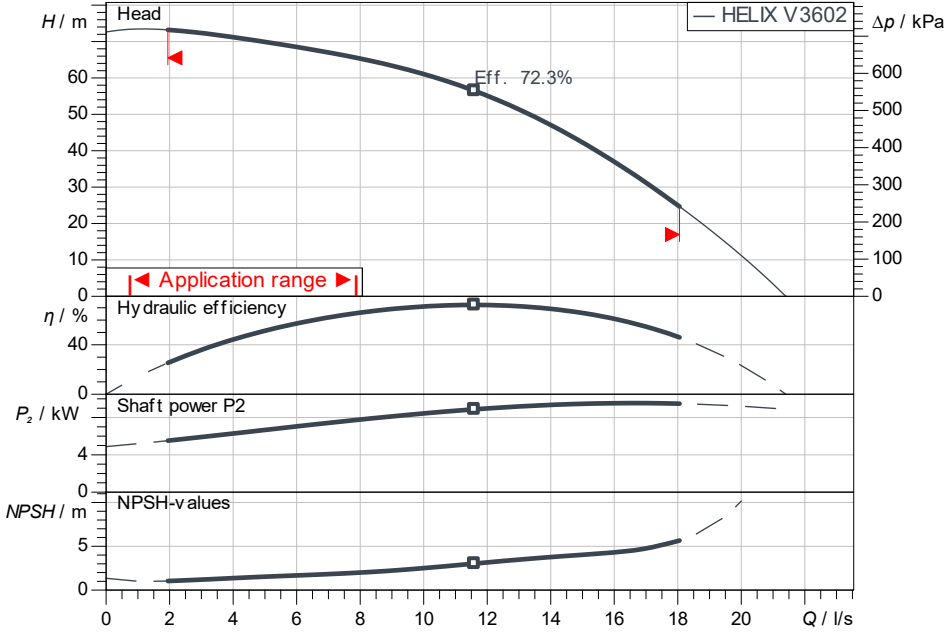

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P ₂	
Hydraulic efficiency	
NPSH	

Product data

High-pressure multistage centrifugal pump	
Helix FIRST V 3602-5/16/E/S/460-60-FF240	
Max. operating pressure	1,600 kPa
Inlet pressure max.	10 bar
Fluid temperature	-20 °C ... +120 °C
Max. ambient temperature	50 °C
Minimum efficiency index (MEI)	

Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~ 460 V / 60 Hz
Permitted voltage tolerance	+6 %
Max. speed	3,523 1/min
Rated power P ₂	11.00 kW
Rated current	17.20 A
Power factor	0.91
Service factor	1.2
Efficiency	
50% / 75% / 100%	//%
Degree of protection	IP55
Insulation class	F
Motor protection	No

Fitting dimensions

Pipe connection on the suction side	DN 65, PN 16
Pipe connection (pressure side)	DN 65, PN 16

Materials

Pump housing	5.1301/EN-GJL-250
Impeller	1.4307
Shaft	1.4057
Shaft seal	BQ7EGG
Gasket material	EPDM

Information for order placements

Weight approx.	112 kg
Item number	4200672

ISO 9906: 2012 3B

Dimensions

H	906
H2	506
ØM	279
X	191
X	182

mm

