

**Customer**


# Technical data

## High-pressure multistage centrifugal pump Helix V 5206/2-2/16/V/KS/400-50

Project ID: Untitled project 2025-03-03 15:12:38.853

Project name  
Installation location  
Customer pos. No.

Date: 2025-03-03

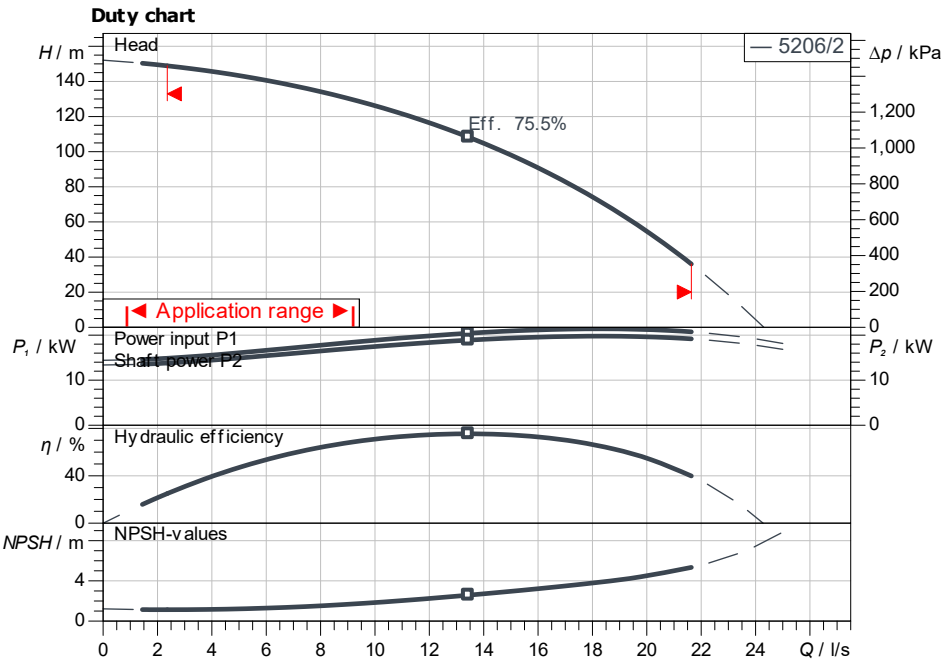

**Requested data**

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

**Hydraulic data (Duty point)**

Flow	
Head	
Shaft power $P_2$	
Hydraulic efficiency	
NPSH	

**Product data**

High-pressure multistage centrifugal pump	
Helix V 5206/2-2/16/V/KS/400-50	
Max. operating pressure	1,600 kPa
Inlet pressure max.	10 bar
Fluid temperature	-15 °C ... +90 °C
Max. ambient temperature	50 °C
Minimum efficiency index (MEI)	≥ 0.7

**Motordata per Motor/Pump**

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+ -10 %
Max. speed	2,940 1/min
Rated power $P_2$	22.00 kW
Rated current	39.10 A
Power factor	0.87
Service factor	1.15
Efficiency	50% / 75% / 100% 92.7/92.7/92.7%
Degree of protection	IP55
Insulation class	F
Motor protection	No

**Fitting dimensions**

Pipe connection on the suction side	DN 80, PN 16
Pipe connection (pressure side)	DN 80, PN 16

**Materials**

Pump housing	1.4409
Impeller	1.4404
Shaft	1.4404
Shaft seal	BQ7VGG
Gasket material	FKM

**Information for order placements**

Weight approx.	229 kg
Item number	4150916

ISO 9906: 2012 3B

**Dimensions**

H	1,69
H2	1,21
ØM	305
X	218
X	200

mm

