

Contact  
E-mail  
Phone

**Customer**

Contact  
E-mail  
Phone

# Technical data


## Glanded energy-saving single pump BL-E40/190-11/2

Project ID: Untitled project 2025-03-02 21:52:22.079

Project name  
Installation location  
Customer pos. No.

Date: 2025-03-02

### Duty chart

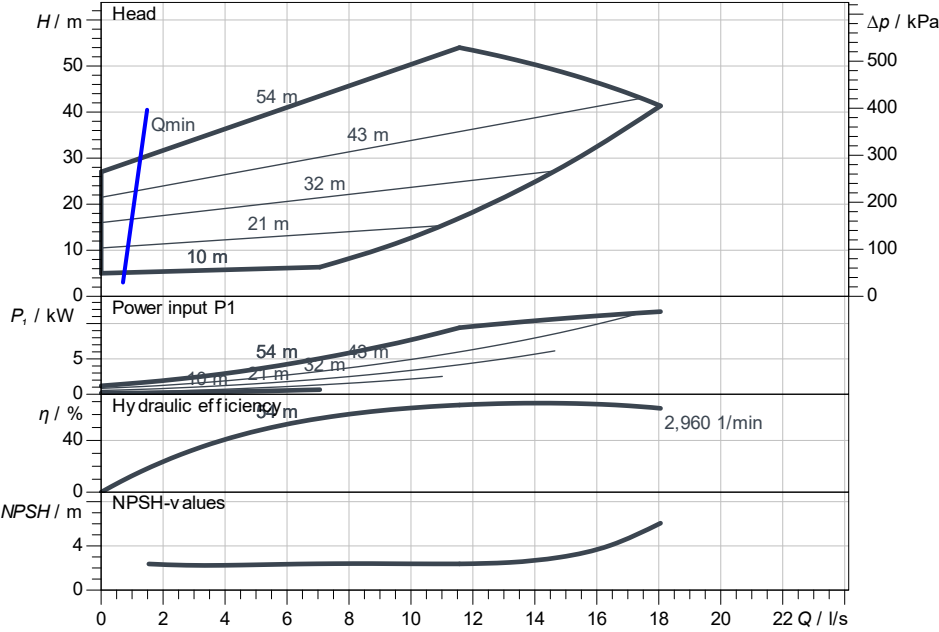

### Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

### Hydraulic data (Duty point)

Flow	
Head	
Power input P1	
NPSH	

### Product data

Glanded energy-saving single pump	
BL-E40/190-11/2	
Kind of operation	dp-v
Max. operating pressure	1,600 kPa
Fluid temperature	-20 °C ... +140 °C
Max. ambient temperature	40 °C
Minimum efficiency index (MEI)	≥ 0.4

### Motordata per Motor/Pump

Motor design	AC motor
Efficiency class	IE4
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+ -10 %
Max. speed	2,950 1/min
Rated power P2	11.00 kW
Rated current	18.10 A
Degree of protection	IP55
Insulation class	F
Motor protection	PTC integrated

### Fitting dimensions

Pipe connection on the suction side	DN 65, PN 16
Pipe connection (pressure side)	DN 40, PN 16
Port to Port	-

### Materials

Pump housing	5.1301, EN-GJL-250 cataphoretic-coated
Impeller	EN-GJL-200
Lantern	5.1301/EN-GJL-250
Shaft	1.4122
Shaft seal	AQ1EGG

### Information for order placements

Weight approx.	175 kg
Item number	2221186

