

**Customer**


## Technical data

### High-pressure multistage centrifugal pump Helix V 608-2/25/V/KS/400-50

Project ID                      Untitled project 2025-03-03 20:19:56.538

Project name  
Installation location  
Customer pos. No.

Date                      2025-03-03

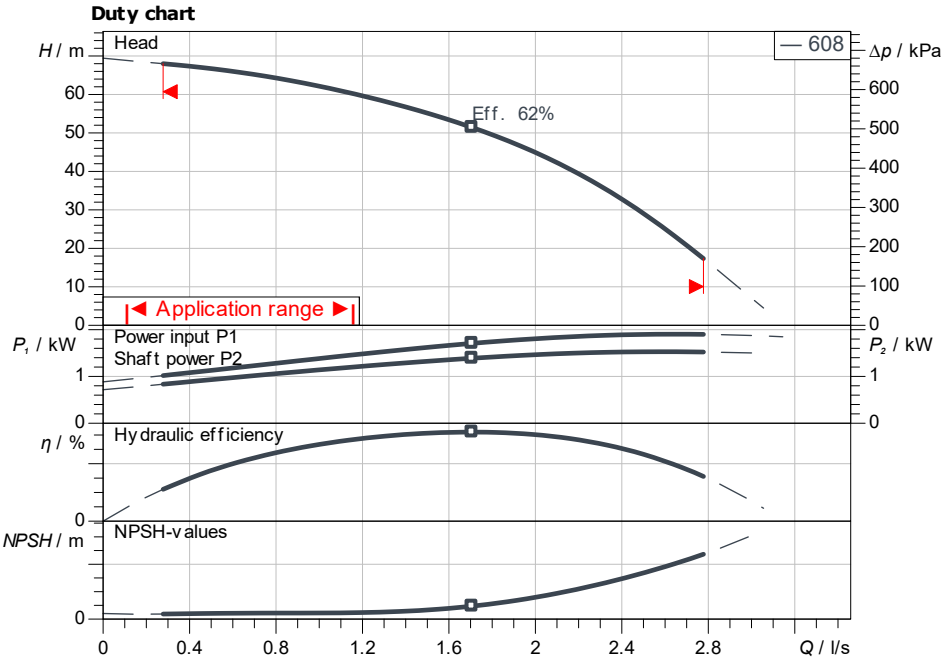

**Requested data**

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

**Hydraulic data (Duty point)**

Flow	
Head	
Shaft power P2	
Hydraulic efficiency	
NPSH	

**Product data**

High-pressure multistage centrifugal pump Helix V 608-2/25/V/KS/400-50	
Max. operating pressure	2,500 kPa
Inlet pressure max.	10 bar
Fluid temperature	-15 °C ... +90 °C
Max. ambient temperature	50 °C
Minimum efficiency index (MEI)	≥ 0.7

**Motordata per Motor/Pump**

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+10 %
Max. speed	2,900 1/min
Rated power P2	1.50 kW
Rated current	3.00 A
Power factor	0.85
Service factor	1.15
Efficiency	50% / 75% / 100%
	80.9/83.8/84.2%
Degree of protection	IP55
Insulation class	F
Motor protection	No

**Fitting dimensions**

Pipe connection on the suction side	DN 32, PN 25
Pipe connection (pressure side)	DN 32, PN 25

**Materials**

Pump housing	1.4404
Impeller	1.4404
Shaft	1.4404
Shaft seal	BQ7VGG
Gasket material	FKM

**Information for order placements**


Weight approx.	42 kg
Item number	4156069

ISO 9906: 2012 3B

**Dimensions**

mm

H	950
H2	656
ØM	172
X	132
X	132



PN25

